



FLUSH - WOOD SUBSTRATE DETAILS
ANTI-DISENGAGEMENT INSTALLATION DETAIL
SOFFIT APPLICATION

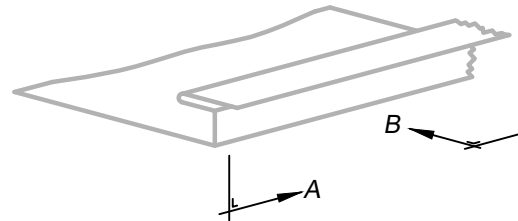


FLUSH PANEL



SECTION A




SECTION A'

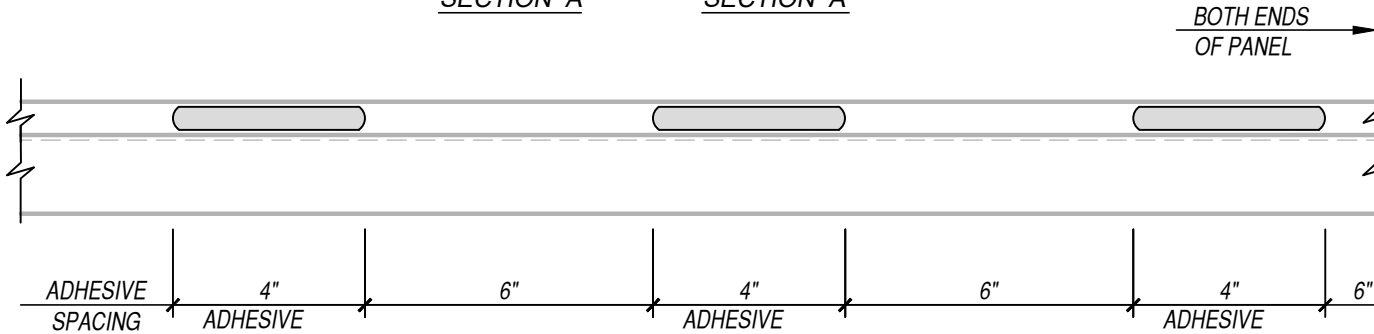

SECTION "B"

SCALE: 3" = 1'-0"



EFFECTIVE DATE: 01-03-2023
SUBJECT TO CHANGE WITHOUT NOTICE

NOTES:

1. CHEMLINK M-1 OR NOVA FLEX ADHESIVE TO BE FIELD APPLIED.
2. PANEL JOINT ELEMENTS TO BE WIPED CLEAN AND DRY.
3. JOINT ASSEMBLY MUST BE WITHIN 30 MINUTES OF ADHESIVE APPLICATION.
4. ADHESIVE BEADS MUST HAVE A 6" GAP BETWEEN BEADS TO ALLOW FOR ADHESIVE MOVEMENT AS BEAD IS COMPRESSED AND DISPLACED VIA MALE EDGE ENGAGEMENT.
5. TO PREVENT JOINT GAPS, THE ENGAGING PANEL MUST SLIDE ($\pm 1/2''$) "BACK AND FORTH" DURING THE MALE EDGE ENGAGEMENT PROCESS.

DISCLAIMER: DETAIL SHOWN FOR ILLUSTRATION PURPOSES ONLY. ACTUAL PROJECT DETAIL MAY VARY